


6FR

6 INCH FULLRANGE

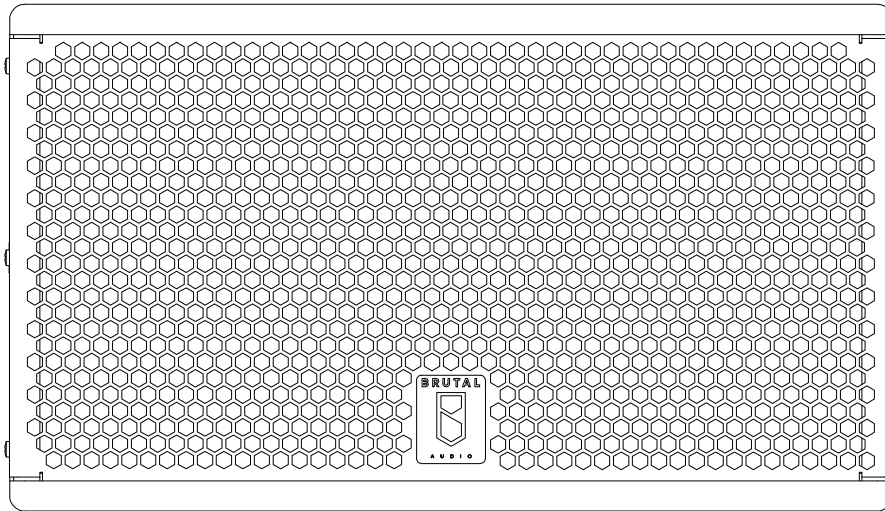

#### TECHNICAL SPECIFICATIONS

AXIAL SENSITIVITY	92dB@1W/1M
IMPEDANCE	8 OHMS
DRIVER	FR : 6" PAPER CONE
ENCLOSURE	PORTED
MAX SPL	110dB@1m
POWER	100W CONT / 200W MAX
FREQUENCY RESPONSE	70Hz TO 16kHz +/-3dB
DIMENSIONS	(HxWxD) 201mm x 350mm x 265mm
WEIGHT	6.5KGS / 14.33 LBS